

ORDINANCE 662

CITY OF LACEY

AN ORDINANCE RELATING TO SIDEWALKS AND SIDEWALK STANDARDS AND AMENDING SECTION 12.24.060 OF THE LACEY MUNICIPAL CODE

BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF LACEY
AS FOLLOWS:

Section 1. Section 12.24.060 of the Lacey Municipal Code is hereby amended to read as follows:

"The design and construction of all sidewalks, curbs, gutters and walkways shall meet the following minimum standards:

"(1) The right-of-way for new streets shall be sufficient width to contain sidewalks on both sides of the street and the roadways shall be graded for the entire width of the right-of-way to accommodate said improvements.

"(2) The width of sidewalks along local access streets and neighborhood collector streets in all residential zones of the city shall be a minimum of five feet, provided, however, that if the sidewalk is separated from the back of the raised edge or curb of the street by at least four feet, said minimum width may be four feet. The width of sidewalks in areas zoned core commercial shall be eight feet. The width of sidewalks along-arterial-streets-and in all commercial and industrial zones of the city except core commercial and along all arterial and commercial collector streets not located in the core commercial area shall be a minimum of six feet provided, however, that if the sidewalk

is separated from the back of the raised edge or curb of the street by at least two feet, said minimum width may be five feet. ~~The minimum width of sidewalks in all industrial zones shall be five feet;~~ provided, however, that those sidewalks designated in the comprehensive bike plan of the city as bike paths shall, in addition, meet the minimum width requirements established for said bike paths and provided, further, the minimum required width of sidewalks along arterial streets and in all commercial and industrial zones may be increased to eight feet pursuant to Section 12.24.070. The director of public works shall require that the design of all sidewalks provides for a gradual rather than an abrupt transition between sidewalks of different widths or alignments.

"(3) All sidewalks shall be constructed of portland cement concrete, brick or other similar hard surface but excluding asphaltic concrete.

"(4) Walkways shall be constructed of portland cement concrete, brick or other similar hard surface or of asphaltic concrete with suitable separation and designation for pedestrian and/or bicycle traffic.

"(5) All sidewalks constructed must provide for handicap ramps in accordance with the standards of the state.

"(6) The design and construction of all sidewalks, walkways, curb and gutter sections, ~~and~~ driveway sections, and the paving between any existing street and the curb, gutter, and sidewalk location shall be in accordance with the design standards of the city ~~and such standards~~

~~and-section-illustrations-as-are-adopted-by-these-design-standards~~
~~of-the-city~~ as set forth in that certain document entitled 'City of
Lacey Development Guidelines'.

PASSED BY THE CITY COUNCIL OF THE CITY OF LACEY, WASHINGTON,
this 18th day of November, 1982.

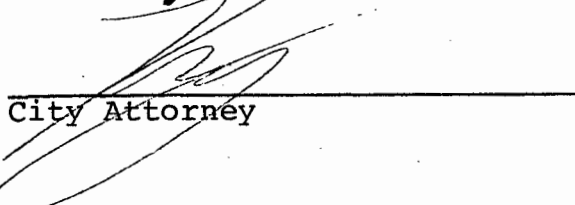
CITY COUNCIL

By 
Mayor

Attest:


City Clerk

Approved as to Form:


City Attorney

Passed: 11-18-82

Published: 11-23-82